



## Webcaster PC System



Das professionelle Live Streaming und Live Recording Webcast System.

Ausgestattet mit den neuesten Capture-, Encoding- und Webcast Lösungen.

Dieses robuste, portable, high performance System ist speziell für Event Produktionen konzipiert. Ausgestattet mit einem hochauflösendem 17.3" (44cm) Monitor, weiteren Monitor Ports, Tastatur und Maus ist es leicht mit der mitgelieferten Tasche zu transportieren.

Die verschiedenen PCI-Express Capture Optionen ermöglichen den Anschluß von beliebigen Audio, Video oder VGA Input Signalen.

Die vorinstallierte IMS - Webcast Software ermöglicht es Ihnen beeindruckende Webcasts zu gestalten und zu steuern.

- Gehäuse: Lightweight, small form-factor ATX or SSI CEB based chassis
- Integrated 17.3" (44cm) Full HD (1920x1080) display with removable protective cover
- Durable aluminum alloy chassis with active cooling
- 500W quiet 80 Plus efficient power supply module
- Physical: 7" (17.8cm) x 13.5" (34.3cm) x 16.9" (42cm), 17-22 lbs / 7.7-10 Kg. (depending on configuration)
- Soft carrying case included + mouse and keyboard
- Inklusive IMS - Webcast Software:  
**IMS Webcaster Pro**  
Zur Erstellung und Produktion individueller Webcast Projekte.
- Alle Geräte sind als Kauf- oder Mietvariante verfügbar.
- Individuelle Ausstattungsvarianten und Spezifikationen (Midi Tower oder Server Version), bieten wir Ihnen natürlich auch gerne an!
- Weitere Informationen finden Sie hier!







### 2 x IMS HD Capture Card - All-In-One

Jede Karte kann, jeweils eines der nachfolgenden Signale verarbeiten:

- SDI + embedded audio
- DVI + audio
- VGA + audio
- Component + audio
- Composite + audio
- S-video + audio
- HDMI + embedded audio

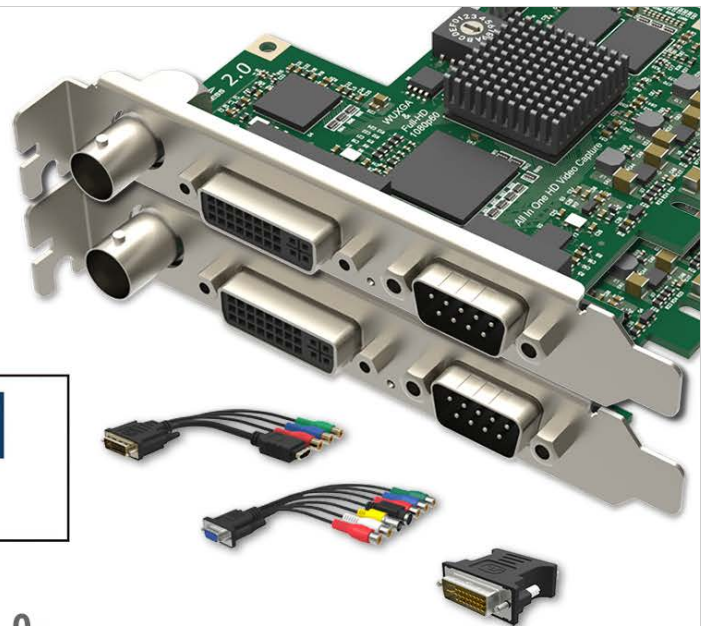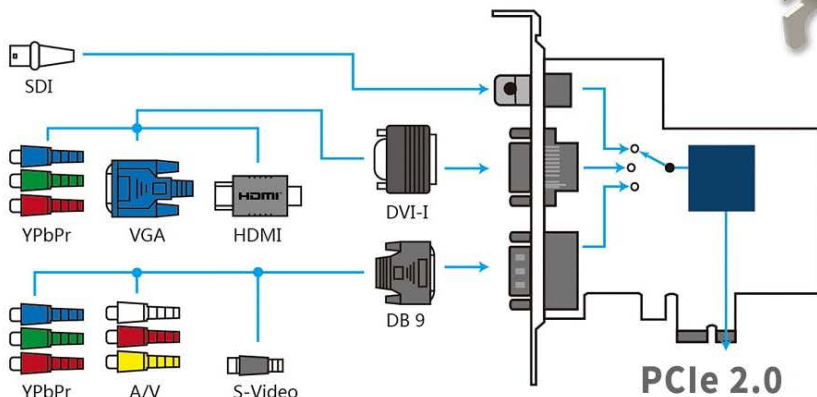

## Webcaster System Portable Workstation

- Power Supply: Silverstone Strider Plus Series PS-ST50F-PB 500 Watt 80 PLUS® Gold Certified Fully Modular PSU
- Motherboard: Gigabyte GA-Z170X-Gaming 3 ATX form-factor, Intel Socket 1151 (Skylake) motherboard
- Processor: Intel Core i7-6700, 3.4 GHz Quad-Core (8 threads) "Skylake" processor, 8MB L3 cache, 65W, Socket LGA 1151 Processor, Processor graphics: Intel HD 530
- Display: 17.3-inch 1920x1080 LED-backlit, 6-bit + HiFRC display, 16.7M colors, 400nit brightness, 600:1 contrast ratio. Connects to PCI Express x16 slot graphics card via an integrated DVI adaptor cable and LVDS display converter.
- Video: Sapphire AMD Radeon R7 240 PCI Express 3.0 x16 graphics card 2GB DDR3 memory. 128-bit interface, 320 Stream Processors. 1x DVI-D, 1x DVI-I, 1x VGA (D-Sub) port. Includes cable kit to internal 1920x1200 LCD with quick disconnect for external display.
- TP-Link TL-WDN4800 Wireless adapter card; PCI Express x1 interface
- Memory: 8GB total DDR4 2133 MHz RAM (non-ECC) (4GB x 2 DIMM dual-channel configuration)
- Operating System: Windows 10 Pro 64-bit
- Carrying Case: Soft travel carrying case with shoulder strap, handle, and pockets for keyboard and mouse

## IMS - HD Capture Card All-In-One (x2)

- Input Interfaces
  - DVI-I
    - DVI 1.0
    - HDMI 1.4a (via breakout cable)
    - VGA (via DVI2VGA connector)
    - Component (via breakout cable)
  - DB9
    - YC (S-Video)
    - Composite video
    - Analog audio (L+R)
    - Component video
  - BNC
    - SD/HD/3G SDI
- Support for output image resolutions up to 2048×2048 pixels
- Support for output frame rates up to 120fps
- Support for 4:2:0 8-bit output formats: NV12, I420, YV12
- Support for 4:2:2 8-bit output formats: YUY2, YUYV, UYVY
- Support for 4:4:4 8-bit output formats: V308, IYU2, V408, BGR24, BGR32
- Support for 4:4:4 10-bit output formats: V410, Y410
- More output formats are supported via Pro Capture SDK for DirectKS
- Full 10-bit video processing



## InterMedia Solutions

IMS a complete webcasting suite

- IMS - GERMANY  
[www.intermedia-solutions.de](http://www.intermedia-solutions.de)  
[info@intermedia-solutions.de](mailto:info@intermedia-solutions.de)  
Tel.: +49 (0)89.244.151.51
- IMS - EUROPE / EMEA  
[www.intermedia-solutions.eu](http://www.intermedia-solutions.eu)  
[info@intermedia-solutions.eu](mailto:info@intermedia-solutions.eu)  
Tel.: +33 (0)970.449.008
- IMS - AMERICAS / APAC  
[www.intermedia-solutions.net](http://www.intermedia-solutions.net)  
[info@intermedia-solutions.net](mailto:info@intermedia-solutions.net)  
Tel.: +1 562.999.2741